


[about BPB](#)
[products](#)
[news & info](#)
[technical services](#)
[BPB home](#)

## Gypsum Board




# Ceiling Decor

from 

## GYPSON COVE, CORNICE AND STEPS

*Add  
elegance &  
sophistication  
to any room.*

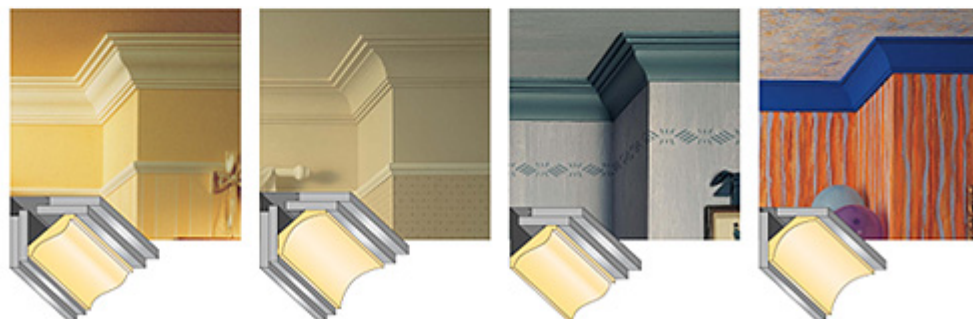

Ceiling Decor from BPB is practical, as well as decorative. It greatly reduces callbacks because Ceiling Decor eliminates the need to tape and finish wall/ceiling joints — where cracking most often occurs. It can also be used to conceal surface wiring or indirect lighting installations.

### Easy to Install

Simply put it up using joint compound or caulking adhesive. No screws. No nails. No warping. No splitting.



[Ceiling Decor Cove & Cornice Installation Instructions PDF File](#)

[Ceiling Decor Cove & Cornice Printable Miter](#)

**Easy to Enhance**

Ceiling Decor opens the door to an exciting world of choice and design flexibility.

**Easy to Decorate**

Use the same paint as you do on gypsum board walls and ceilings. The premium-quality paper facing ensures a smooth finish and a perfect color match every time.

**Easy on the Budget**

Ceiling Decor costs are comparable to finger jointed wood molding.

**Easy on the Mind**

When fire-resistance is a concern, it's comforting to know that Ceiling Decor has a non-combustible gypsum core.

**Templates Word File**

 [PDF Brochure](#)

[Ceiling Decor Cove and Cornice MSDS](#)  [PDF](#)

[Ceiling Decor Steps MSDS](#)  [PDF](#)

Product Specifications	COVE	CORNICE	STEP
NOMINAL LENGTH	8 ft (2.44 m) or 12 ft (3.66 m) +3/4 - 0 in. (+20 - 0 mm)	8 ft (2.44 m) +3/4 - 0 in. (+20 - 0 mm)	8 ft (2.44 m) +3/4 - 0 in. (+20 - 0 mm)
CHORD/PROFILE WIDTH	A 4 1/2 in. (109 mm) +/- 1/16 in. (1.0 mm)	A 4 7/16 in. (113 mm) +/- 1/16 in. (1.0 mm)	A 7 in. (178 mm) +/- 1/16 in. (1.0 mm)
MAIN MEMBER THICKNESS	B 3/8 in. (10.0 mm) +/- 1/32 in. (0.5 mm)	B 3/4 in. (20.0 mm) +/- 1/32 in. (0.5 mm)	B 1/2 in. (12.7 mm) +/- 1/32 in. (0.5 mm)
SIDE MEMBER THICKNESS	C 1/4 in. (6.0 mm) +/- 1/32 in. (0.5 mm)	C 5/16 in. (8.5 mm) +/- 1/32 in. (0.5 mm)	—
RADIUS	D 3 1/4 in. (83 mm)	—	—
CURVATURE	E 3/4 in. (19.5 mm) +/- 1/16 in. (1.0 mm)	—	—
DEPTH	—	D 7/16 in. (10.5 mm) +/- 1/32 in. (0.5 mm)	—
SIDE MEMBER ANGLES	F 45° + 5°	E 43° - 53° F 37° - 47°	—
BACK MEMBER ANGLE	—	G 25° - 35° H 35° - 45°	—
BACK ANGLE	X Not less than 90°	X 105° - 115°	—
WEIGHT	0.75 lbs./ft. (1.1 kg/m)	0.87 lbs./ft. (1.3 kg/m)	1.06 lbs./ft. (1.6 kg/m)

The curved surface of the Cove or Cornice shall constitute a smooth curve, free from bumps and grooves. Any product with improper paper adhesion, scuffing, blisters, defects that would be objectionable to the user, should be rejected.

[HOME](#) • [ABOUT BPB](#) • [PRODUCTS](#) • [NEWS & INFO](#) • [TECHNICAL SERVICES](#) • [CAREERS](#)

If you have any questions, please call our [Customer Response Center](#)  
toll free at 1-866-4 BPB USA (1-866-427-2872).  
Outside U.S. and Canada, call +1-813-286-3900.

[BPB Group](#) [BPB Westroc](#) [Contact](#) [Careers](#) [Customer Service](#) [Legal](#)

 search